


Programmable Shunt Regulator

TBL431H

FEATURES

- Programmable output voltage to 36 volts
- Low dynamic output impedance 0.20 typical
- Sink current capability of 1.0 to 100mA
- Equivalent full-range temperature coefficient of 50ppm/°C typical
- Temperature compensated for operation over full rated
Operating temperature range -40~+125°C
- Low output noise voltage
- Fast turn-on response
- Halogen free
- Qualified to AEC-Q101 standards for high reliability

HF

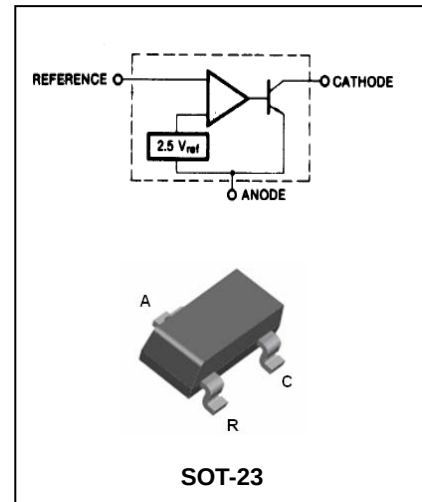

ORDERING INFORMATION

Type No.	Marking	Package Code
TBL431H	431H	SOT-23

MAXIMUM RATING @ Ta=25°C unless otherwise specified

Parameter	Symbol	limits	unit
Electrostatic discharge (HBM), per ANSI/ESDA/JEDEC JS-001 ^(Note1)	$V_{(ESD)}$	± 2000	V
Electrostatic discharge (CDM), per JEDEC specification JESD22C101 ^(Note2)		± 1000	
Cathode Voltage	V_{KA}	36	V
Cathode current Range(Continuous)	I_{KA}	-100 to +150	mA
Reference Input Current Range	I_{REF}	0.05 to 10	mA
Power dissipation	P_D	350	mW
Thermal Resistance Junction-to-Ambient	$R_{\theta JA}$	350	°C/W
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	155	°C/W
Operating Junction Temperature	T_J	150	°C
Operating temperature Range	T_{OPR}	-40 to +125	°C
Storage temperature Range	T_{STG}	-65 to +150	°C

Programmable Shunt Regulator

TBL431H

Notes:

1. JEDEC document JEP155 states that 500-v HBM allows safe manufacturing with a standard ESD control process. Manufacturing with less than 500-v HBM is possible with the necessary precautions.
2. JEDEC document JEP157 states that 250-v CDM allows safe manufacturing with a standard ESD control process. Manufacturing with less than 250-v CDM is possible with the necessary precautions.

Recommended Operating Conditions

Parameter	symbol	Min	Typ	Max	Unit
Cathode Voltage	V_{KA}	V_{REF}	-	36	V
Cathode Current	I_{KA}	1.0	-	100	mA

ELECTRICAL CHARACTERISTICS @ $T_a=25^{\circ}\text{C}$ unless otherwise specified

Parameter	symbol	conditions	Min.	Typ.	Max.	unit
Reference Input voltage	V_{REF}	$V_{KA}=V_{REF}, I_{KA}=10\text{mA}$	2.44	2.5	2.55	V
Deviation of Reference Input Voltage Over-Temperature	$\Delta V_{REF}/\Delta T$	$V_{KA}=V_{REF}, I_{KA}=10\text{mA}, T_{MIN} \leq T_A \leq T_{MAX}$		4.5	17	mV
Ratio of Change in Reference Input Voltage to the Change in Cathode Voltage	$\Delta V_{REF}/\Delta V_{KA}$	$I_{KA}=10\text{mA}, \Delta V_{KA}=10\text{V}-V_{REF}$		-10	-2.7	mV/V
		$\Delta V_{KA}=36\text{V}-10\text{V}$		-0.5	-2.0	
Reverse Input current	I_{REF}	$I_{KA}=10\text{mA}, R_1=10\text{K}\Omega, R_2=\infty$		1.5	4	μA
Deviation of Reference Input Current Over Full Temperature Range	$\Delta I_{REF}/\Delta T$	$I_{KA}=10\text{mA}, R_1=10\text{K}\Omega, R_2=\infty, T_A=\text{Full Range}$		0.4	1.2	μA
Minimun Cathode Current for Regulation	$I_{KA(MIN)}$	$V_{KA}=V_{REF}$		0.45	1.0	mA
Off-Stage Cathode Current	$I_{KA(OFF)}$	$V_{KA}=36\text{V}, V_{REF}=0$		0.05	1.0	μA
Dynamic Impedance	Z_{ZA}	$V_{KA}=V_{REF}, I_{KA}=1 \text{ to } 100\text{mA}, f \geq 1.0\text{KHz}$		0.15	0.5	Ω

• $T_{MIN}=-40^{\circ}\text{C}, T_{MAX}=+125^{\circ}\text{C}$

CLASSIFICATION OF V_{ref}

Rank	0.5%	1%	2%
Range	2.488-2.512	2.475-2.525	2.450-2.550

Programmable Shunt Regulator

TBL431H

TYPICAL CHARACTERISTICS @ $T_A = 25^\circ\text{C}$ unless otherwise specified

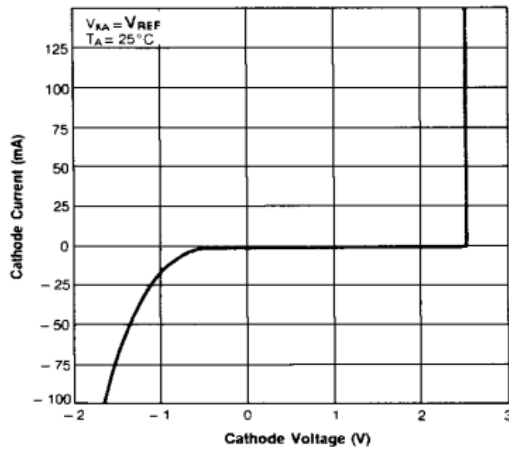


Figure 1. Cathode Current vs. Cathode Voltage

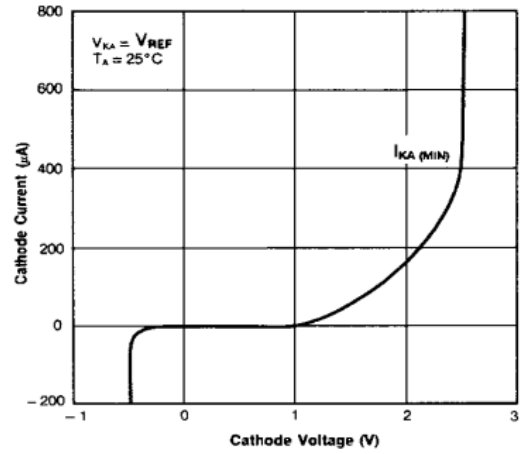


Figure 2. Cathode Current vs. Cathode Voltage

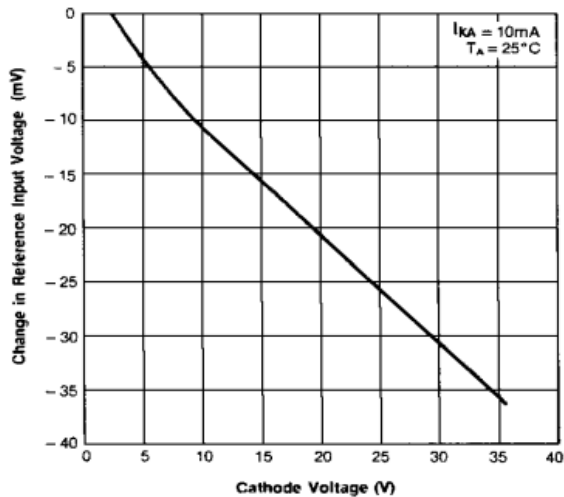


Figure 3. Change In Reference Input Voltage vs. Cathode Voltage

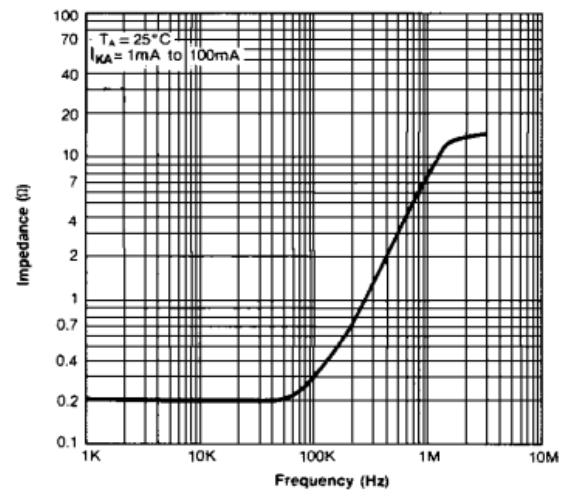


Figure 4. Dynamic Impedance Frequency

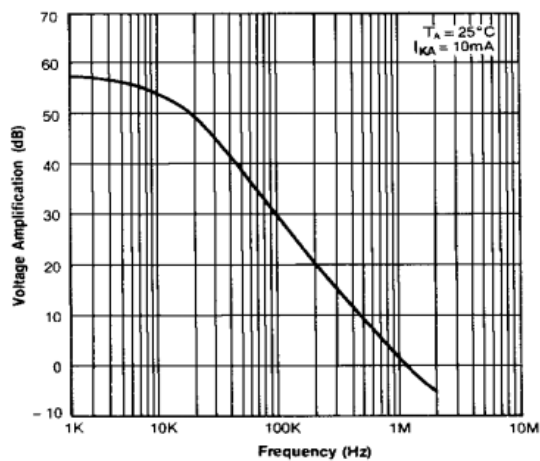


Figure 5. Small Signal Voltage Amplification vs. Frequency

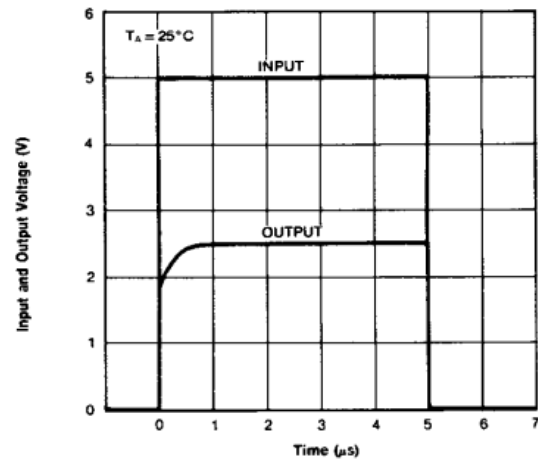


Figure 6. Pulse Response

Programmable Shunt Regulator

TBL431H

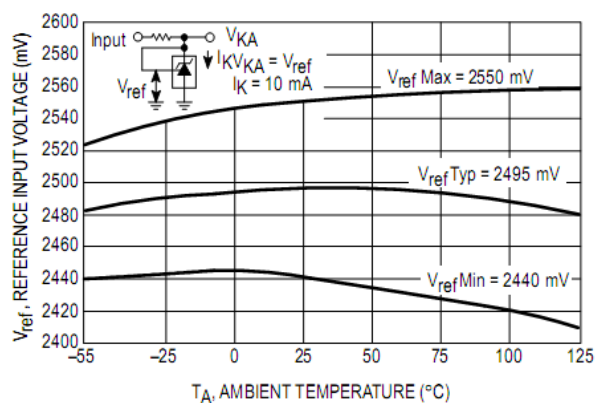


Figure 7. Reference Input Voltage versus Ambient Temperature

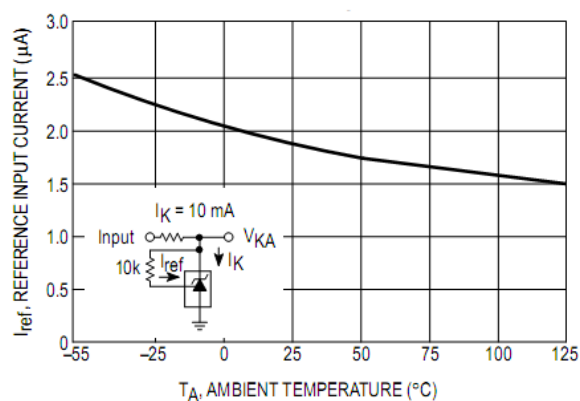


Figure 8. Reference Input Current versus Ambient Temperature


Programmable Shunt Regulator

TBL431H


PACKAGE OUTLINE

Plastic surface mounted package

SOT-23

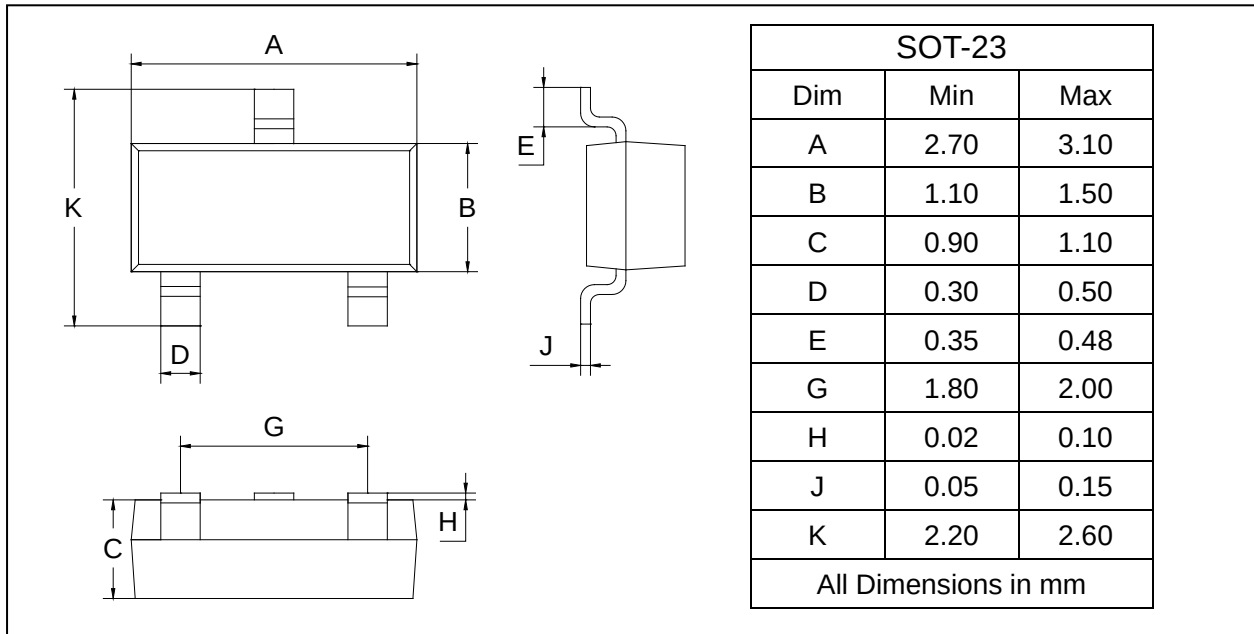

SOLDERING FOOTPRINT

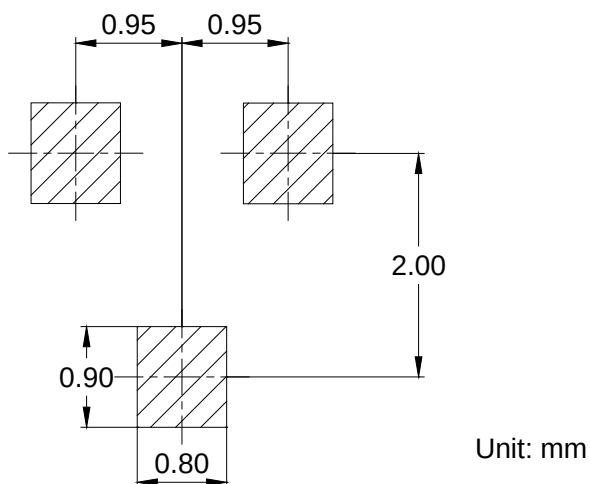

PACKAGE INFORMATION

Device	Package	Shipping
TBL431H	SOT-23	3000pcs / Tape & Reel