

Silicon Bridge Rectifiers

DB154S--DB157S

Features

- Glass passivated junction
- High surge current capability
- Saves space on printed circuit boards
- High temperature soldering guaranteed:
260°C/10 seconds



- RoHS Compliant

Mechanical Data

- Case: Molded plastic body RoHS-compliant
- Molding compound meets UL 94 V-0 flammability rating
- Terminals: Lead Free Plating (Matte Tin Finish.)
- Polarity indicator: As marked on body

Maximum Ratings (@T_A = 25°C unless otherwise specified)

Characteristic	Symbol	DB154S	DB155S	DB156S	DB157S	Units
Peak repetitive reverse voltage	V _{RRM}	400	600	800	1000	V
RMS reverse voltage	V _{RMS}	280	420	560	700	V
DC blocking voltage	V _{DC}	400	600	800	1000	V
Maximum average forward output current	I _{F(AV)}	1.5				A
Peak forward surge current, 8.3ms single half-sine-wave	@T _J = 25°C I _{FSM}	40				A
I ² t Rating for fusing	@T _J = 25°C I ² t	6.6				A ² s

Thermal Characteristics

Parameter	Symbol	DB154S	DB155S	DB156S	DB157S	Units
Typical thermal resistance per leg (Note 1)	R _{θJA}	70				°C/W
	R _{θJC}	31				
	R _{θJL}	29				
Operating junction temperature range	T _J	- 55 ---- + 150				°C
Storage temperature range	T _{STG}	- 55 ---- + 150				°C

Note:

1. Device mounted on PCB with 10 mm x 20 mm x 0.1mm copper pad areas

Silicon Bridge Rectifiers

DB154S--DB157S

Electrical Characteristics (@T_A = 25°C unless otherwise specified)

Parameter	Symbol	Test conditions		Typ.	Max.	Units
Maximum instantaneous forward voltage	V _F	I _F =1.5A Per Diode		--	1.1	V
Maximum Reverse current	I _R	Rated V _R , Per Diode	@T _A =25°C	--	10	μ A
			@T _A =100°C	--	1	mA

Silicon Bridge Rectifiers

DB154S--DB157S

Ratings and Characteristic Curves ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Fig.1-Forward Current Derating Curve

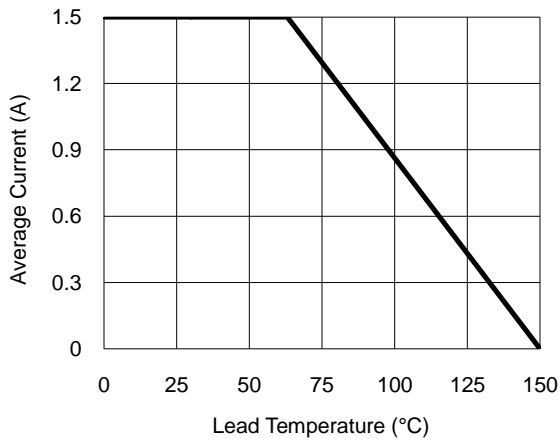


Fig.2- Surge Current Derating Curve

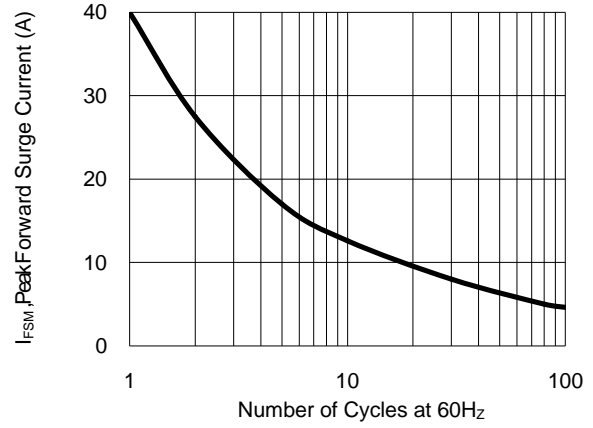


Fig.3- Typical Forward Voltage Characteristic


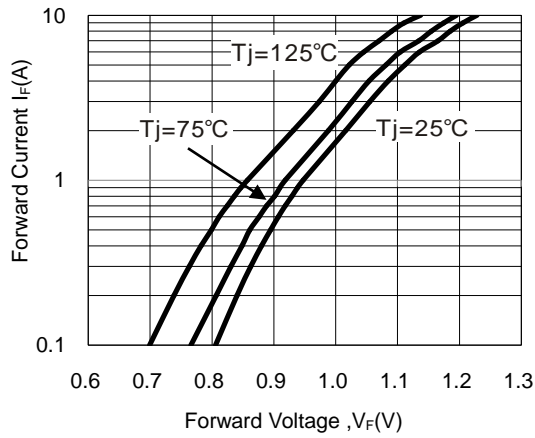



Fig.4- Typical Reverse Characteristic

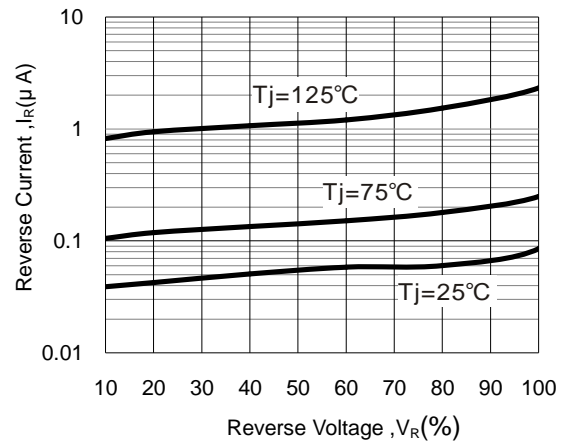


Silicon Bridge Rectifiers

DB154S--DB157S

Package Outline Dimensions(unit:mm)

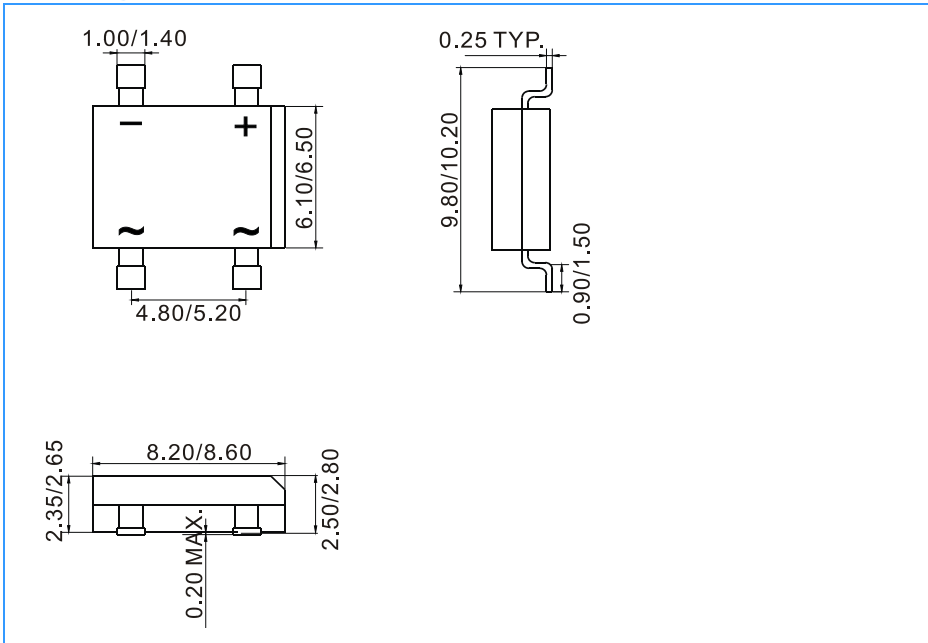

Mounting Pad Layout(unit:mm)

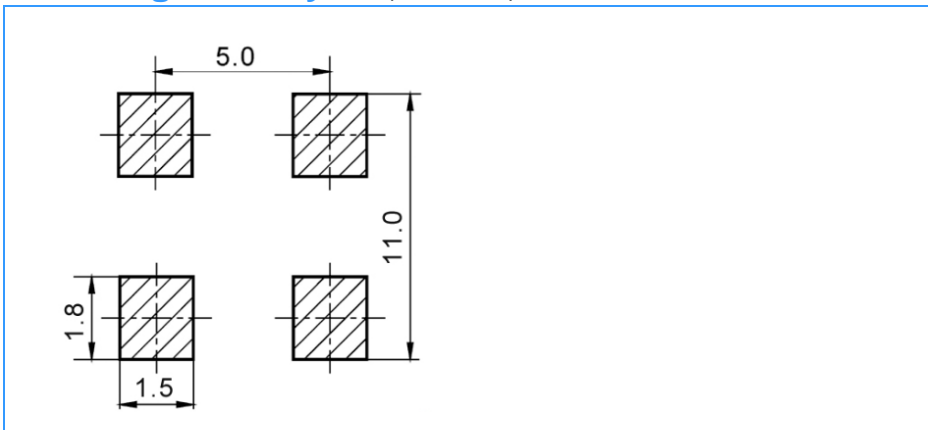

Ordering Information

Part No.	Marking	Package	Shipping
DB154S	DB154S	DFS	50/Unit&Pipe
DB155S	DB155S	DFS	50/Unit&Pipe
DB156S	DB156S	DFS	50/Unit&Pipe
DB157S	DB157S	DFS	50/Unit&Pipe