


Programmable Shunt Regulator

BL432E

FEATURES

- Low dynamic output impedance 0.20 typical
- Sink current capability of 1.0 to 100mA
- Equivalent full-range temperature coefficient of 50ppm/°C typical
- Temperature compensated for operation over full rated Operating temperature range
- Low output noise voltage
- Fast turn-on response
- RoHS compliant with Halogen-free

HF

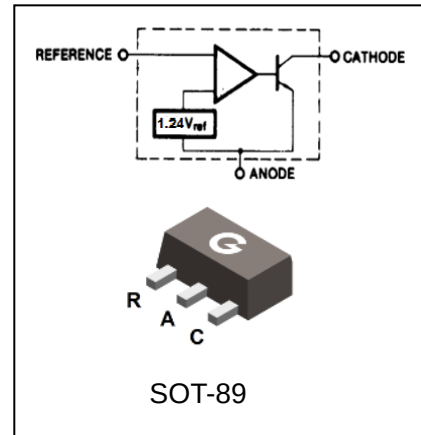

ORDERING INFORMATION

Type No.	Marking	Package Code
BL432E	432	SOT-89
BL432E-A	432	SOT-89
BL432E-B	432	SOT-89

MAXIMUM RATING @ Ta=25°C unless otherwise specified

Parameter	symbol	limits	unit
Cathode Voltage	V_{KA}	15	V
Cathode current Range(Continuous)	I_{KA}	100	mA
Reference Input Current Range	I_{REF}	-0.05 to +3	mA
Power dissipation	P_D	330	mW
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	350	°C/W
Thermal Resistance, Junction to Case	$R_{\theta JC}$	155	°C/W
Operating Temperature Range	T_{OPR}	0 to 70	°C
Operating Junction Range	T_J	-40 to +150	°C
Storage temperature Range	T_{STG}	-65 to +150	°C

Recommended Operating Conditions

Parameter	symbol	Min	Typ	Max	Unit
Cathode Voltage	V_{KA}	V_{REF}	-	15	V
Cathode Current	I_{KA}	1.0	-	100	mA

Programmable Shunt Regulator

BL432E





ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

Parameter	symbol	conditions	Min.	Typ.	Max.	unit
Refer Input Voltage	V_{REF}	$V_{KA}=V_{REF}, I_{KA}=10mA$ BL432E-A (0.5%) BL432E (1%) BL432E-B (2%)	1.233 1.228 1.215	1.24 1.24 1.24	1.247 1.252 1.265	V
Deviation of Reference Input Voltage Over Full Temperature Range	$\Delta V_{REF}/\Delta T$	$V_{KA}=V_{REF}, I_{KA}=10mA$ TA=Full Range		10	25	mV
Ratio of Change in Reference Input Voltage to the Change in Cathode Voltage	$\Delta V_{REF}/\Delta V_{KA}$	$V_{KA}=1.25V$ to $14.5V$		1.0	2.7	mV/V
Reverse Input current	I_{REF}	$R_1=10K\Omega, R_2=\infty$		0.5	1	μA
Deviation of Reference Input Current Over Full Temperature Range	$\Delta I_{REF}/\Delta T$	$R_1=10K\Omega, R_2=\infty$ TA=Full Range		0.05	0.3	μA
Minimum Cathode Current for Regulation	$I_{KA(MIN)}$	$V_{KA}=V_{REF}$		60	80	μA
Off-Stage Cathode Current	$I_{KA(OFF)}$	$V_{KA}=15V, V_{REF}=0$		0.04	0.5	μA
Dynamic Impedance(Note2)	Z_{ZA}	$V_{KA}=V_{REF}, I_K=0.1mA \sim 20mA$ $f \leq 1.0kHz$		0.2	0.4	Ω

Programmable Shunt Regulator

BL432E

TYPICAL CHARACTERISTICS @ $T_a=25^\circ\text{C}$ unless otherwise specified

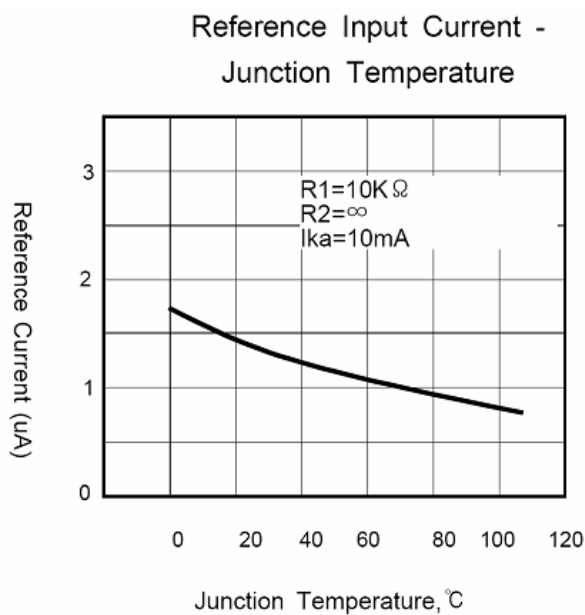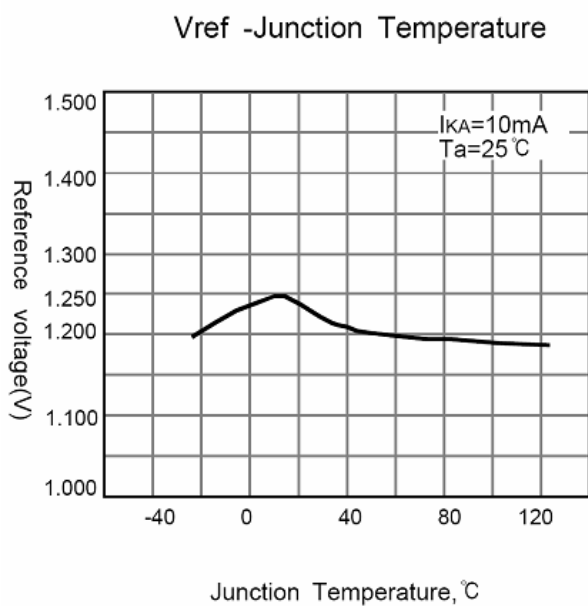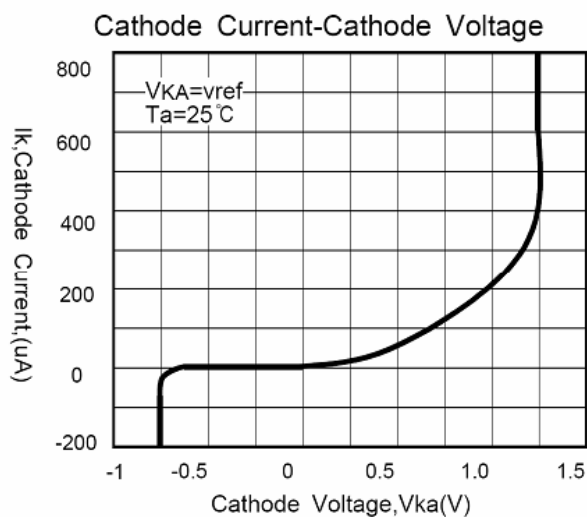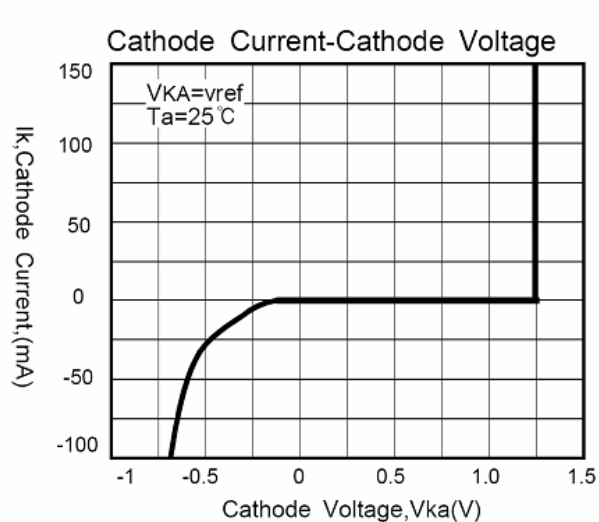


Programmable Shunt Regulator

BL432E


PACKAGE OUTLINE

Plastic surface mounted package

SOT-89

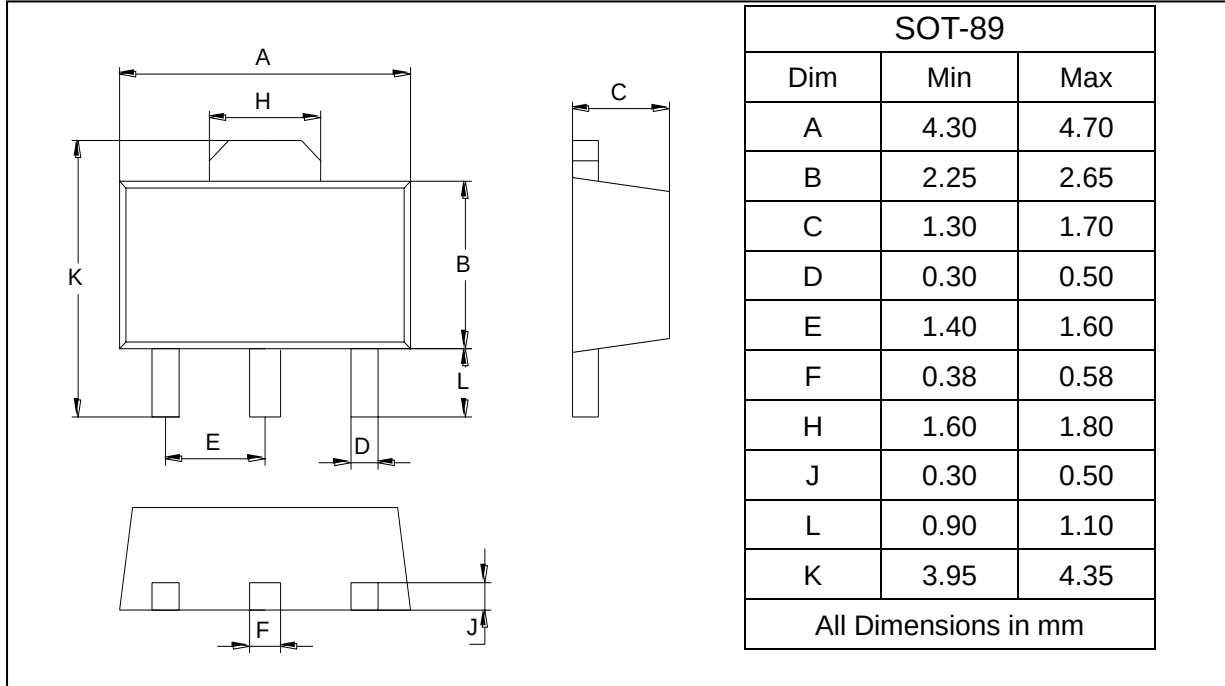

SOLDERING FOOTPRINT

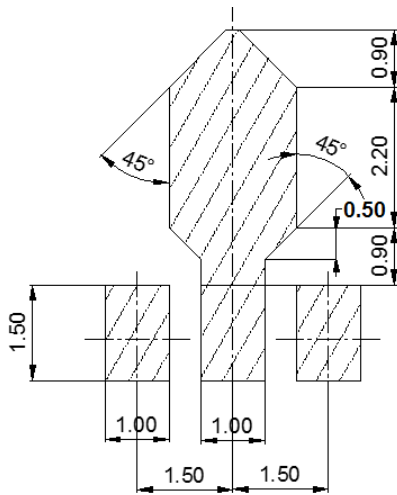

Unit: mm

PACKAGE INFORMATION

Device	Package	Shipping
BL432E / BL432E-A / BL432E-B	SOT-89	1000 pcs / Tape & Reel